


Professional Solutions
Since 2000 

HANKONG
QINGDAO HANKONG TYRE LTD.

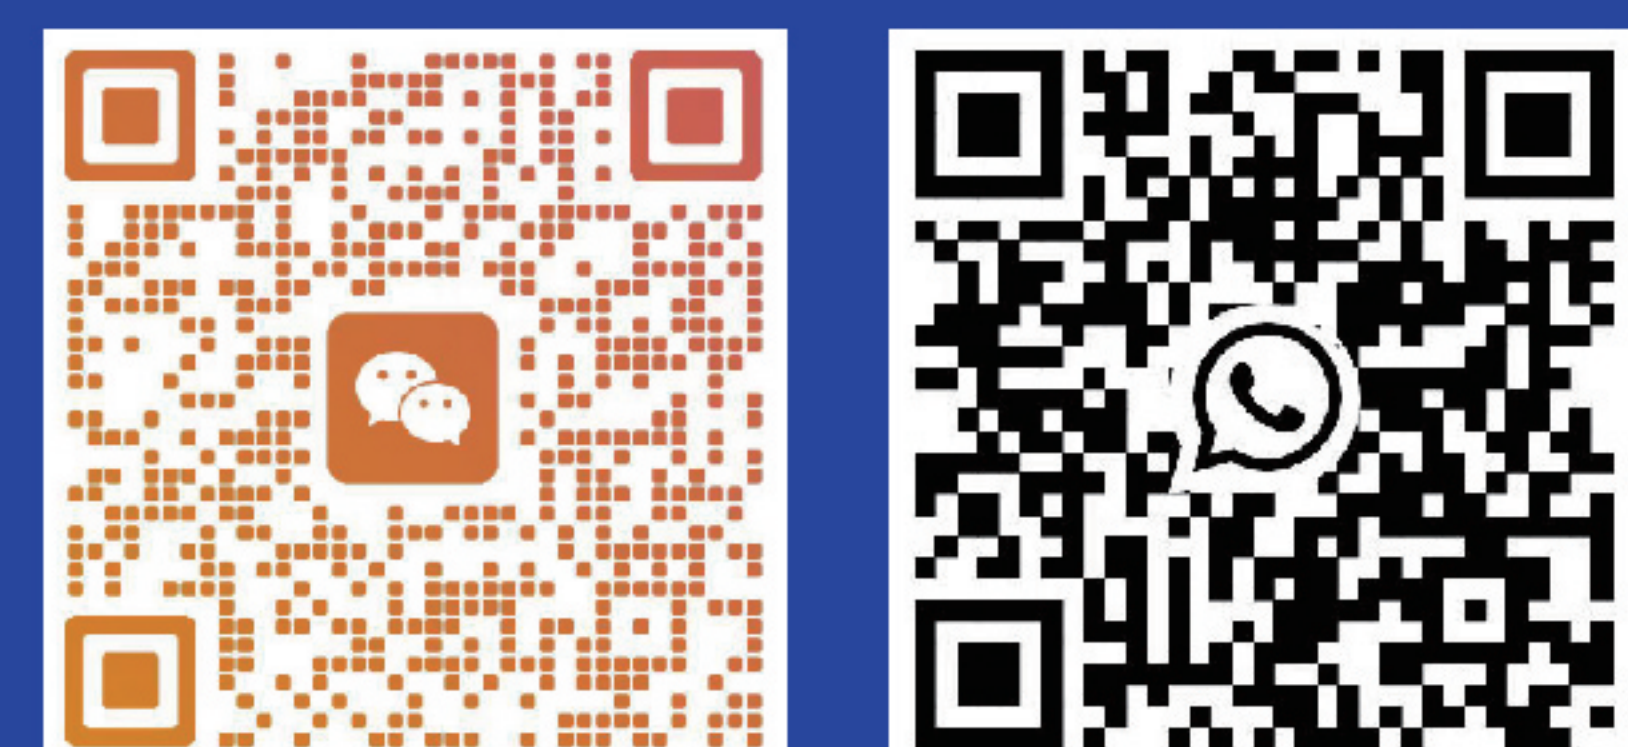

218 West Coast Road, Huangdao, Qingdao, China.
Tel: +86-532-83978005
Email: sales@hankongtyre.com
<https://www.hankongtyre.com>

HANKONG

**BEYOND MILES
BEYOND
EXPECTATIONS**



**TRUCK & BUS
TYRES**

 **MADE IN CHINA AND THAILAND**

COMPANY INTRODUCTION ///

— **Qingdao Hankong Tyre Ltd.** is making tyres with professional team for more than 20 years. Branches are available in China(Qingdao,Guangzhou), Thailand and Kazakhstan. Tyres are powered by European Technology with the Professional Technical Team who worked with top enterprises since 2000.

— **Main Products & Services:**

1. Truck & Bus Tire.
2. SUV Car PickUp & Van Tire.
3. OTR Tyre(Loader,Earthmover,Grader,Rigid Dumping Truck,Mining).
4. Agriculture Tyre.
5. Steel Wheel Rim.
6. Professional Services for Doubling Tires(putting small tires into big tires),Mixing Tires,Rims and other products together in Containers.

— **Hankong** is always helping clients Reduce Total Costs by providing Value Products and Professional Services in all processes of Purchasing, Delivery and After-sales, including brand development,market protection,sales promotion, etc.

— **Mission:**

Creating and Achieving ALL-WIN for our Clients, Partners,Team Members and Shareholders by providing exceptional value with products and services.

— **Vision:**

Be a company that contributes to society.



CONTENTS ///

ST235/80R16	11R24.5	12.00R24
ST235/85R16	12R22.5	325/95R24
8.5R17.5	13R22.5	12.00R20
9.5R17.5	295/75R22.5	11.00R20
205/75R17.5	285/75R24.5	10.00R20
215/75R17.5	255/70R22.5	9.00R20
225/75R17.5	275/70R22.5	8.25R20
235/75R17.5	295/60R22.5	8.25R16
245/75R17.5	315/60R22.5	7.50R16
245/70R17.5	275/80R22.5	7.00R16
225/80R17.5	285/80R22.5	6.50R16
225/90R17.5	295/80R22.5	14.00R20
8R19.5	315/80R22.5	16.00R20
225/70R19.5	315/70R22.5	12.5R20
245/70R19.5	385/55R22.5	335/80R20
265/70R19.5	385/65R22.5	365/80R20
285/70R19.5	425/65R22.5	395/85R20
305/70R19.5	445/65R22.5	425/85R21
8R22.5	435/50R19.5	
9R22.5	445/45R19.5	
10R22.5		
11R22.5		



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
ST235/80R16	HKA10	14	129/125 L	6.50	235	782	192	1850/1650	760	10.0
ST235/85R16	HKA10	14	132/127 L	6.50	235	806	192	2000/1750	760	10.0
8.5R17.5	HKA10	16	121/120 M	6.00	215	802	196	1450/1400	625	12.0
9.5R17.5	HKA10	18	131/129 L	6.75	240	842	198	1950/1850	830	14.0
205/75R17.5	HKA10	16	124/122 M	6.00	205	753	180	1600/1500	750	13.0
205/75R17.5	HKD50	16	124/122 L	6.00	205	753	180	1600/1500	750	10.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
215/75R17.5	HKA10	16	135/133 L	6.00	211	767	185	1700/1600	830	13.0
215/75R17.5	HKD50	16	135/133 L	6.00	211	773	185	2180/2060	860	15.0
225/75R17.5	HKA10	16	129/127 M	6.75	226	789	187	1850/1750	860	14.5
225/75R17.5	HKD50	16	129/127 M	6.75	226	789	187	1850/1750	860	15.0
235/75R17.5	HKA10	16	143/141 L	6.75	233	797	192	2725/2575	860	14.0
235/75R17.5	HKD50	18	143/141 L	6.75	233	803	192	2725/2575	860	15.0
245/75R17.5	HKA10	18	136/134 M	7.50	248	839	208	2240/2120	830	15.0
245/75R17.5	HKD50	18	136/134 M	7.50	248	839	208	2240/2120	830	16.0
245/70R17.5	HKA10	18	136/134 M	7.50	245	786	208	2240/2120	830	14.0
245/70R17.5	HKD50	18	136/134 M	7.50	245	786	208	2240/2120	830	14.0



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
225/80R17.5	HKD50	16	123/122 M	6.75	226	805	186	1550/1500	700	15.5
225/90R17.5	HKA10	16	130/128 L	6.75	226	851	186	1900/1800	760	13.5
8R19.5	HKA10	16	127/125 L	6.00	203	859	196	1750/1650	850	13.0
225/70R19.5	HKA10	16	128/126 L	6.75	226	811	186	1800/1700	830	14.0
225/70R19.5	HKD50	16	128/126 L	6.75	226	817	186	1800/1700	830	15.0
245/70R19.5	HKA10	16	136/134 J	7.50	248	839	208	2240/2120	830	14.0
245/70R19.5	HKD50	16	136/134 M	7.50	248	845	208	2240/2120	830	15.5

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
265/70R19.5	HKA10	18	143/141 J	7.50	262	867	225	2725/2575	860	14.0
265/70R19.5	HKD50	18	143/141 J	7.50	262	873	225	2725/2575	900	15.5
285/70R19.5	HKA10	18	146/144 L	8.25	283	895	235	3000/2800	900	14.0
285/70R19.5	HKD50	18	150/148 J	8.25	283	895	235	3350/3150	900	16.0
305/70R19.5	HKA10	18	146/143 M	9.00	305	923	245	3000/2725	900	15.0
8R22.5	HKA10	14	130/128 M	6.00	203	947	190	1900/1800	830	13.0
9R22.5	HKA10	14	136/134 M	6.75	229	974	205	2240/2120	830	13.5
10R22.5	HKA10	16	144/142 K	7.50	254	1019	215	2800/2650	900	14.5



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
11R22.5	HKT12	16	146/143 L	8.25	274	1050	206	3000/2725	830	10.0
11R22.5	HKA10	16	146/143 M	8.25	274	1050	230	3000/2725	830	15.5
11R22.5	HKD30	16	146/143 M	8.25	292	1059	212	3000/2725	830	20.5
11R22.5	HKD35	16	146/143 M	8.25	279	1054	212	3000/2725	830	22.0
11R22.5	HKA11	18	149/146 M	8.25	292	1048	216	3250/3000	830	15.0
11R22.5	HKA20	16	146/143 K	8.25	292	1047	220	3000/2725	830	15.0
11R22.5	HKD33	16	146/143 L	8.25	279	1054	216	3000/2725	830	19.5
11R22.5	HKW2	18	149/146 K	8.25	279	1065	230	3250/3000	930	21.0
11R22.5	HKW1	18	149/146 K	8.25	279	1054	244	3250/3000	930	22.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
11R24.5	HKT12	16	149/146 L	8.25	279	1104	206	3250/3000	830	10.0
11R24.5	HKA11	16	149/146 M	8.25	292	1048	206	3250/3000	830	15.0
11R24.5	HKD30	16	149/146 M	8.25	292	1059	208	3250/3000	830	21.0
11R24.5	HKW2	16	149/146 K	8.25	279	1116	230	3250/3000	830	21.0
11R24.5	HKW1	16	149/146 K	8.25	279	1104	244	3250/3000	830	22.0



HKS1



HKT10



HKT11



HKA20



HKA21



HKD50



HKM70



HKM70



HKM77

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
12R22.5	HKS1	18	152/149 L	9.00	296	1082	242	3550/3250	900	18.0
12R22.5	HKT10	18	152/149 L	9.00	296	1078	230	3550/3250	900	16.5
12R22.5	HKT11	18	152/149 L	9.00	296	1078	230	3550/3250	900	15.5
12R22.5	HKD50	18	152/149 K	9.00	296	1088	242	3550/3250	930	21.0
12R22.5	HKM70	20	152/149 D	9.00	298	1088	240	3550/3250	930	20.5

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
13R22.5	HKA20	18	154/151 K	9.75	331	1108	238	3750/3450	830	15.0
13R22.5	HKA21	20	156/153 K	9.75	320	1119	246	4000/3650	930	18.0
13R22.5	HKM70	20	156/150 G	9.75	320	1126	250	4000/3650	930	21.0
13R22.5	HKM77	20	156/153 K	9.75	320	1126	260	4000/3650	930	23.0



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
295/75R22.5	HKT12	16	146/143 L	9.00	294	1010	234	3000/2725	830	15.0
295/75R22.5	HKD30	16	146/143 K	9.00	294	1026	234	3000/2725	830	21.0
285/75R24.5	HKT12	16	146/143 L	8.25	283	1050	212	3075/2800	830	10.0
285/75R24.5	HKD30	16	146/143 L	8.25	283	1050	216	3075/2800	830	20.6
255/70R22.5	HKT10	16	140/137 L	9.00	255	930	216	2500/2300	830	13.0
275/70R22.5	HKT10	18	148/145 M	9.00	280	952	230	3150/2900	900	15.0
275/70R22.5	HKD50	18	148/145 M	9.00	292	958	240	3150/2900	900	19.0
295/60R22.5	HKA10	18	150/147 L	9.00	292	924	240	3350/3075	900	15.0
295/60R22.5	HKD50	18	150/147 L	9.00	292	926	240	3350/3075	900	19.0
315/60R22.5	HKA10	18	152/148 L	9.75	313	950	250	3550/3150	900	15.0
315/60R22.5	HKD50	18	152/148 L	9.75	313	950	250	3550/3150	900	20.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
275/80R22.5	HKT10	18	149/146 L	8.25	280	1008	230	3250/3000	900	15.0
285/80R22.5	HKT10	18	149/146 L	9.00	286	1020	236	3250/3000	900	15.5
295/80R22.5	HKA10	18	152/149 L	9.00	292	1040	240	3550/3250	900	15.5
295/80R22.5	HKA11	18	152/149 L	9.00	292	1041	240	3550/3250	900	16.0
295/80R22.5	HKD50	18	152/149 K	9.00	292	1046	246	3550/3250	900	20.0
295/80R22.5	HKD53	18	152/149 L	9.00	298	1044	250	3550/3250	900	20.6
295/80R22.5	HKM70	18	152/149 K	9.00	298	1050	252	3750/3250	900	21.5



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
315/80R22.5	HKA20	20	157/154 K	9.00	306	1070	235	4125/3750	900	15.0
315/80R22.5	HKA21	20	157/154 L	9.00	312	1076	246	4125/3750	900	16.0
315/80R22.5	HKD32	20	157/154 K	9.00	306	1078	242	4125/3750	900	20.5
315/80R22.5	HKD50	20	157/154 K	9.00	306	1082	246	4125/3750	900	22.0
315/80R22.5	HKA10	22	157/154 K	9.00	306	1076	265	4125/3750	900	17.0
315/80R22.5	HKD51	22	157/154 K	9.00	306	1084	278	4125/3750	900	22.0
315/80R22.5	HKM70	22	157/154 K	9.00	306	1084	278	4125/3750	900	23.0
315/80R22.5	HKD53	20	157/154K	9.00	306	1084	246	4125/3750	900	22.0
315/80R22.5	HKW1	20	154/151 M	9.00	312	1076	260	3750/3450	830	20.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
315/70R22.5	HKT10	18	154/150 L	9.00	312	1014	260	3750/3350	900	15.0
315/70R22.5	HKD50	18	154/150 L	9.00	312	1014	264	3750/3350	900	21.0
315/70R22.5	HKA10	20	156/153 L	9.00	310	1010	274	4000/3350	900	16.0
315/70R22.5	HKD51	20	156/153 L	9.00	310	1020	287	4000/3350	900	21.0
315/70R22.5	HKW2	18	154/150 L	9.00	312	1014	260	3750/3350	900	19.0
315/70R22.5	HKW1	18	154/150 L	9.00	312	1020	264	3750/3350	900	20.0



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
385/55R22.5	HKT91	20	160 K	12.25	386	996	320	4500	900	15.0
385/55R22.5	HKT90	20	160 K	12.25	386	996	320	4500	900	15.3
385/65R22.5	HKT91	20	160 L	11.75	376	1072	296	4500	900	15.5
385/65R22.5	HKT90	24	160 K	11.75	389	1072	306	4500	900	16.7
385/65R22.5	HKD92	20	164 K	11.75	389	1072	306	4500	900	18.0
385/65R22.5	HKT95	24	164 K	11.75	389	1072	306	5000	930	16.5
385/65R22.5	HKW1	20	160 K	11.75	389	1072	306	4500	900	20.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
425/65R22.5	HKT94	20	165 K	12.25	422	1124	320	5150	825	16.0
425/65R22.5	HKT91	20	165 K	12.25	422	1124	320	5150	825	16.0
425/65R22.5	HKD92	20	166 J	12.25	422	1124	324	5300	900	17.5
445/65R22.5	HKT94	20	169 K	13.00	444	1150	350	5800	900	17.0
445/65R22.5	HKT91	20	169 K	13.00	444	1150	350	5800	900	17.0
445/65R22.5	HKD92	20	170 J	13.00	444	1150	350	5800	900	17.5
435/50R19.5	HKT97	20	164 J	14.00	438	923	362	5000	900	13.0
445/45R19.5	HKT97	20	160 J	15.00	446	892	386	4500	900	13.0



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
12.00R24	HKA20	20	160/157 K	8.50	312	1220	238	4500/4125	900	17.5
12.00R24	HKA22	20	160/157 K	8.50	315	1226	240	4500/4125	900	17.0
12.00R24	HKM70	22	160/157 F	8.50	315	1238	240	4500/4125	900	24.0
12.00R24	HKM77	22	160/157 K	8.50	315	1238	231	4500/4125	900	24.0
325/95R24	HKA22	22	162/160 K	9.00	315	1226	238	4750/4500	850	16.0
325/95R24	HKA20	22	162/160 K	9.00	315	1226	226	4750/4500	830	16.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
12.00R20	HKA20	20	156/153 K	8.50	310	1119	238	4000/3650	900	16.5
12.00R20	HKD35	22	156/153 K	8.50	313	1122	250	4000/3650	900	22.0
12.00R20	HKM71	20	156/153 F	8.50	313	1122	240	4000/3650	900	24.0
12.00R20	HKM72	22	156/153 D	8.50	304	1136	252	4000/3650	900	26.0
12.00R20	HKM77	22	158/155 F	8.50	313	1122	231	4000/3650	900	21.5
12.00R20	HKM75	22	156/153 D	8.50	304	1132	240	4000/3650	900	24.5



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
11.00R20	HKA20	18	152/149 K	8.00	288	1083	223	3550/3250	930	17.0
11.00R20	HKM75	18	152/149 F	8.00	292	1093	244	3550/3250	930	24.0
10.00R20	HKA20	18	149/146 K	7.50	270	1046	209	3250/3000	930	16.0
10.00R20	HKA21	18	149/146 K	7.50	274	1048	214	3250/3000	930	16.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
9.00R20	HKA20	16	144/142 K	7.00	260	1018	195	2800/2650	900	15.5
9.00R20	HKD34	16	144/142 K	7.00	260	1018	198	2800/2650	900	17.5
8.25R20	HKA10	16	139/137 K	6.50	236	974	187	2430/2300	930	14.0
8.25R20	HKA20	16	139/137 K	6.50	236	974	187	2430/2300	930	14.0
8.25R16	HKA10	16	128/124 K	6.50	235	857	178	1800/1600	770	13.0
8.25R16	HKA20	16	128/124 K	6.50	235	857	178	1800/1600	770	13.0



Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
7.50R16	HKA10	14	122/118 L	6.00G	212	802	160	1500/1320	770	13.0
7.50R16	HKA20	14	122/118 L	6.00G	212	802	160	1500/1320	770	13.0
7.00R16	HKA10	14	118/114 L	5.50F	197	771	160	1320/1180	770	11.5
7.00R16	HKA20	14	118/114 L	5.50F	197	771	160	1320/1180	770	11.0
6.50R16	HKA10	12	110/105 K	5.50F	186	748	143	1060/925	670	10.0
6.50R16	HKA20	12	110/105 K	5.50F	186	748	143	1060/925	670	10.0

Technical Information

Size	Pattern	PR	Load Speed Index	Standard Rim	Section Width	Overall Diameter	Tread Width	Max Load	Pressure	Tread Depth
					(mm)	(mm)	(mm)	(kg)	(Kpa)	(mm)
14.00R20	HKA81	20	164/161 J	10.00	375	1253	—	5000/4625	790	20.0
16.00R20	HKA81	22	174/171 G	11.25	443	1306	—	6700/6150	760	21.5
12.5R20	HKA80	—	—	9.00	1120	365	—	2200/2000	450/350	22.0
335/80R20	HKA82	16	149 K	11.00	340	1044	—	3250	650	16.9
365/80R20	HKA82	16	154 L	10.00	360	1092	—	3750	650	17.0
395/85R20	HKA82	22	168 G	10.00	400	1228	—	5600	660	21.5
425/85R21	HKA83	24	167 D	10.00	425	1260	—	6500	820	24.0